



# RT UT Decking screw

## RN 90LR06



### GEOMETRY

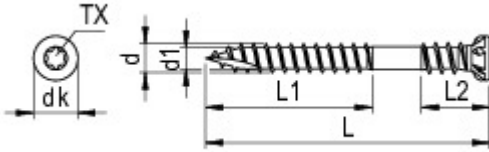

Material: Stainless steel A2  
Surface: plain, lubricated

### ASSORTMENT

d [mm]	L [mm]	L1 [mm]	Drive	d1 [mm]	dk [mm]	L2 [mm]
5,0	50	30	TX 20	3,4	7,8	12,5
5,0	60	33	TX 20	3,4	7,8	12,5
5,0	70	40	TX 20	3,4	7,8	12,5
5,0	80	43	TX 20	3,4	7,8	12,5

### TECHNOLOGY

Approval: CE EN 14592


d [mm]	5,0
Tensile strength [kN]	5,5

### FIELD OF APPLICATION

Screwing all common softwoods, hardwoods and tropical woods

Gardening and landscaping, terrace construction, façades, fencing

# RT UT Decking screw RN 90LR06



## PROCESSING

In hardwood, pre-drilling the decking boards is recommended.

Length 50 mm for max. 20 mm boards, length 60 mm for max. 27 mm boards, length 70 mm for max. 30 mm boards, length 80 mm for max. 37 mm boards.

Usage: approx. 35 pcs./m<sup>2</sup>.

